

motor suppressor RC, 3x575VAC/45kW

RC single

1 suppression module per phase required

Image

- Mounting method
- on/in motor or distribution terminal box
- DIN-rail mountable TH35 (EN 60715)

Vicarious picture

Technical Data

Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
Temperature range	-20...+60 °C
Dimensions H × W × D	61 x 25 x 92 mm
Frequency	50...60 Hz

General data

Connection	approx. 500 mm, single cores 1 mm ²
------------	--

Commercial data

Net weight	154
Weight unit	gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Minimum order quantity (piece)	1

Accessories

Control systems ASA DIN-rail mounting adapter

Art.-No.

20900


Comments

For DIN-rail mounting use 2 x Art.- No. 20900 adapter feet

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

1 suppression module per phase required

Circuit diagram

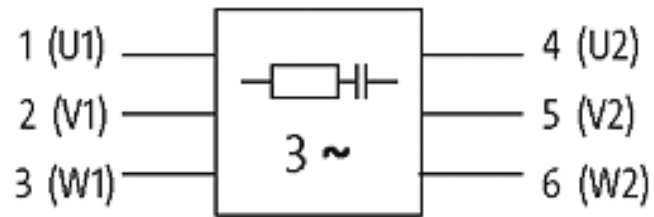

RC-(1) per phase

Dimension drawing

