



### Model Number

#### LGS25 Serie

#### Light grid

with fixed cable with 4-pin, M12 x 1 connector, and fixed cable with 8-pin, M12 x 1, connector

### Features


- Automation light grid
- Optical resolution 25 mm
- Super-fast object detection, even with 3-way beam crossover
- Software-free adjustment of height monitoring
- Object identification using integrated object recognition
- IO-link interface for service and process data
- Optional temperature range to -30 °C

### Product information

The LGS automation light grid series detects objects ranging in size from small to large. The very slender light grids have a modular design and come in different beam spacings and field heights. All signal evaluation takes place inside the unit. The lightweight systems can be integrated in their surroundings in a well-designed configuration, which means that machines and plants in temperature ranges between -30 °C ... +60 °C can be designed more compactly.

### Dimensions

Transmitter

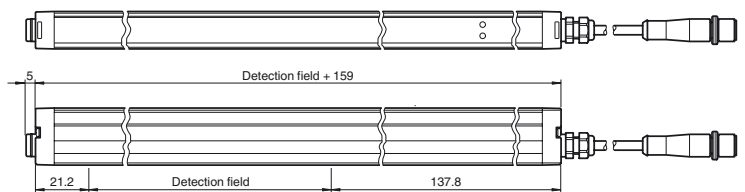


Receiver




### Electrical connection


Transmitter




Receiver

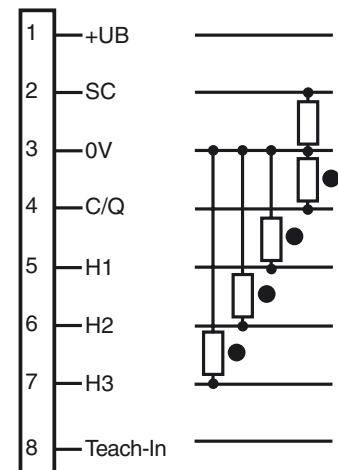

### Pinout



### Indicators/operating means



1	Menu button	yellow	7	Height checking 3	yellow
2	Operating indicator	green	8	Object floating	yellow
3	Status display	yellow	9	Crossing	yellow
4	Q object	yellow	10	Peripheral beam tolerance	yellow
5	Height checking 1	yellow	11	2nd level	yellow
6	Height checking 2	yellow	12	OK button	yellow

2nd level: Beam collimation, inverse mode, light-on/dark-on switching, reset factory setting, signal tracking

**Technical data****General specifications**

Effective detection range	Standard : 0.3 ... 6 m Option /35: 0.5 ... 8 m
Threshold detection range	Standard : 7.5 m Option /35: 10 m
Light source	IREL
Light type	modulated infrared light , 850 nm
Field height	see Table 1, max. 3200 mm
Chipping	Factory setting: 3-way, deactivateable
Tuning-out of beam	adjustable max. 2 fixed suppressible beam areas (blinking)
Beam spacing	25 mm
Number of beams	see Table 1, max. 129
Operating mode	Emitter: Emitting power adjustable in two areas
Optical resolution	without beam crossover: 25 mm with beam crossover: 12.5 mm with in 25% and 75% of the range
Angle of divergence	10 °
Ambient light limit	> 50000 Lux (if external light source is outside the opening angle)

**Functional safety related parameters**

MTTF <sub>d</sub>	34 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	60 %

**Indicators/operating means**

Operating display	Power on: LED green, statically lit , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function display	Emitter: Yellow LED, illuminates at high emitting power, off at low emitting power Receiver: Yellow LED: illuminates when an object is detected flashes when falling short of the stability control (4 Hz) Error message: Yellow LED flashes (8 Hz) in emitter and receiver
Controls	Receiver: 2 pushbuttons for programming
Parameterization display	IO link communication: green LED goes out briefly (f = 1 Hz)

**Electrical specifications**

Operating voltage	U <sub>B</sub>	18 ... 30 V DC
Ripple		10 %
No-load supply current	I <sub>0</sub>	Transmitter ≤ 50 mA Receiver: ≤ 150 mA (without outputs)
Time delay before availability	t <sub>v</sub>	see Table 1, max. 2.3 s

**Interface**

Interface type	IO-Link
Protocol	IO link V1.0
Mode	COM 2 (38.4 kBaud)

**Input**

Test input	Emitter switch-off with +UB or 0 V at pin 4 (emitter)
Function input	Range input activation from 1.6 m (or 2 m in case of option /35) with +UB or 0 V on pin 2 (emitter) Teach-in input for programming on pin 8 (receiver)

**Output**

Pre-fault indication output	Stability Control (SC) 1 PNP, short-circuit protected, reverse polarity protected on pin 2 (receiver)
Switching type	Factory setting: dark ON , Switchable to light ON mode
Signal output	Switch output (detection field C/Q) 1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected on pin 4 (receiver), Height monitoring (H1, H2, H3) 3 push-pull (4 in 1) outputs, short-circuit proof, reverse polarity protected on pin 5, pin 6, pin 7 (receiver)
Switching threshold	Factory setting: The signal tracking for the threshold value is deactivated, increasing the optical resolution by a maximum of 4 mm; switchable to active signal tracking
Switching voltage	max. 30 V DC
Switching current	max. 100 mA
Voltage drop	U <sub>d</sub> ≤ 2 V DC
Switching frequency	f see Table 1, max. 135 Hz
Response time	see Table 1, max. 12 ms
Timer function	Off-delay programmable from 0 ... 1.25 s in 5 ms steps (adjustment via IO-Link only)

**Ambient conditions**

Ambient temperature	Standard : -10 ... 60 °C (14 ... 140 °F) Option /146: -30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)

**Mechanical specifications**

Housing length L	see Table 1, max. 3360 mm
Protection degree	IP67

**Accessories****OMH-LGS-01**

Attachment aid for light grid series LGS/ LGM

**OMH-SLCT-01**

Quick clamp and adjustment system

**AA SLCT-01**

Profile alignment aid

**OMH-SLCT-04**

Mounting bracket including adjustment (with loose bearing)

**OMH-SLCT-05**

Mounting bracket including adjustment

**OMH-SLCT-03**

Mounting bracket including adjustment

**V1-G-BK2M-PUR-UL**

Cable socket, M12, 4-pin, PUR cable

**V1-G-BK5M-PUR-UL**

Cable socket, M12, 4-pin, PUR cable

**V1-G-BK10M-PUR-UL**

Cable socket, M12, 4-pin, PUR cable

**V1-G-BK15M-PUR-UL**

Cable socket, M12, 4-pin, PUR cable

**V19-G-BK10M-PUR-IEC**

Cable socket, M12, 8-pin, PUR-cable

**V19-G-BK2M-PUR-IEC**

Cable socket, M12, 8-pin, PUR-cable

**V19-G-BK5M-PUR-IEC**

Cable socket, M12, 8-pin, PUR-cable

**V19-G-BK2M-PUR-U-V1-G**

Connection cable, M12 to M12, 8/4-pin, PUR cable

**IO-Link-Master01-USB**

IO-Link Master

**IO-Link-Master-USB DTM**

Communication DTM for use of IO-Link-Master

**PACTware 4.X**

FDT-Framework

**IODD Interpreter DTM**

Software for the integration of IODDs in a frame application (e. g. PACTware)

**LGS-Serie IODD**

IODD for communication with LGS-11-IO-Link sensors

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

Connection Emitter: 200 mm connecting cable with 4-pin, M12x1 connector  
Receiver: 200 mm connecting cable with 8-pin, M12 x 1 connector  
Cable cross section min. 0.25 mm<sup>2</sup>  
Max. cable length 30 m

Material  
Housing extruded aluminum section , Silver anodized  
Optical face Plastic pane , Polycarbonate  
Mass see Table 1, max. 1750 g (per profile)


#### Compliance with standards and directives

Directive conformity  
EMC Directive 2004/108/EC EN 60947-5-2:2007  
Standard conformity  
Product standard EN 60947-5-2:2007  
IEC 60947-5-2:2007

#### Approvals and certificates

Protection class III ( IEC 61140 )  
UL approval cULus Listed  
CCC approval Products with a maximum operating voltage of  $\leq 36$  V do not bear a CCC marking because they do not require approval.

#### Curves/Diagrams

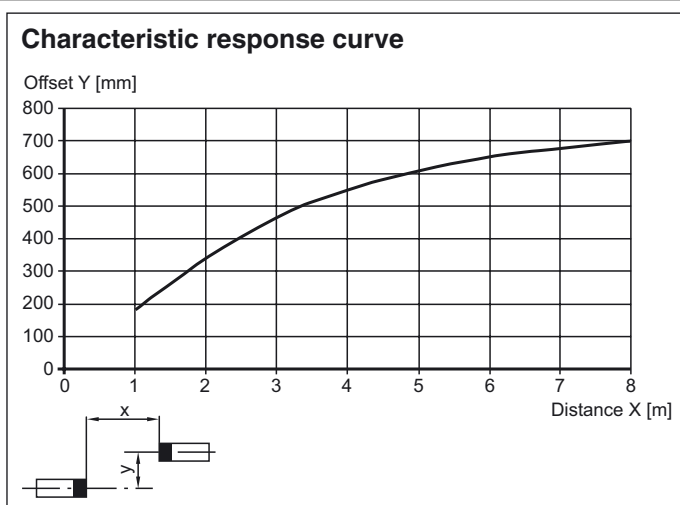

#### Additional information

Table 1:

Switch-on delay, maximum switching frequency and maximum time delay before availability:

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability $t_v$ [s]
	typ.	max.	typ.	max.		
100	2	4	5	6	134	0.8
200	3	5	5	7	125	0.9
300	3	5	5	7	118	0.9
400	3	5	5	8	112	0.9
500	3	5	6	8	106	1.0
600	3	5	6	9	101	1.0
700	3	6	6	9	96	1.
800	3	6	6	10	92	1.1
900	3	6	7	10	88	1.2
1000	4	6	7	11	84	1.2
1100	4	7	7	11	81	1.3
1200	4	7	7	12	78	1.3
1300	4	7	8	12	75	1.4
1400	4	7	8	13	72	1.4
1500	4	8	8	13	70	1.5
1600	4	8	8	14	67	1.5
1700	4	8	9	14	65	1.6
1800	5	8	9	15	63	1.6
1900	5	9	9	15	61	1.7
2000	5	9	9	16	60	1.7

Release date: 2013-01-10 15:14 Date of issue: 2013-01-23 232506\_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411  
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs  
Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**pepperl+fuchs**  
SENSING YOUR NEEDS

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability t <sub>v</sub> [s]
2100	5	9	10	16	58	1.8
2200	5	9	10	17	56	1.8
2300	5	10	10	17	55	1.9
2400	5	10	10	18	53	1.9
2500	5	10	11	18	52	1.9
2600	6	10	11	19	51	2.0
2700	6	11	11	19	49	2.0
2800	6	11	11	20	48	2.1
2900	6	11	12	20	47	2.1
3000	6	11	12	21	46	2.2
3100	6	12	12	21	45	2.2
3200	6	12	12	22	44	2.3

**Number of beams, housing length and weight:**

Field height [mm]	Number of beams	Overall length of the transmitter/receiver unit [mm]	Weight of the transmitter/receiver unit [g]
100	5	260	200
200	9	360	250
300	13	460	300
400	17	560	350
500	21	660	400
600	25	760	450
700	29	860	500
800	33	960	550
900	37	1060	600
1000	41	1160	650
1100	45	1260	700
1200	49	1360	750
1300	53	1460	800
1400	57	1560	850
1500	61	1660	900
1600	65	1760	950
1700	69	1860	1000
1800	73	1960	1050
1900	77	2060	1100
2000	81	2160	1150
2100	85	2260	1200
2200	89	2360	1250
2300	93	2460	1300
2400	97	2560	1350
2500	101	2660	1400
2600	105	2760	1450
2700	109	2860	1500
2800	113	2960	1550
2900	117	3060	1600
3000	121	3160	1650
3100	125	3260	1700
3200	129	3360	1750

**Design and function****Safety information**

The device must only be operated with Safety Extra Low Voltage (SELV) with safe electrical disconnection. Intervention and repairs must only be carried out by your suppliers.

The system must be serviced and checked regularly.

A clean, soft cloth can be used for cleaning. Aggressive, abrasive cleaning agents that damage the surface must be avoided.

The device must not be subjected to hard knocks or vibration.

**Commissioning**

## Prerequisites

- The transmitter and receiver must be installed and aligned correctly.
- The electrical connection must be established according to the connection diagram.

- The signal output must respond to object detection.
- If at least one light beam is interrupted, the output remains active as long as the object is detected.

### Fault location

- Measure operating voltage
- Check the cabling.
- Check the transmitter and receiver for dirt and clean if necessary.

### Function displays

Behind the optics cover on the connection side of the profiles there is a green Power ON operating indicator LED and a yellow status display LED.

#### Transmitter

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark and yellow status indicator flashes	Power save mode
Yellow status indicator LED is dark	Transmitter with low transmitting power
Yellow status indicator LED lights up statically	Transmitter with high transmitting power
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition
Yellow status indicator LED light changes for short time	Test input is activated

#### Receiver

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark	Power save mode
Green operating indicator LED flashes with brief interruption	IO-Link mode active, parameterisation only possible via IO-Link
Green operating indicator LED flashes (4 Hz)	Error condition: Short circuit at the outputs
Yellow status indicator LED lights up statically	Detection field interrupted
Yellow status indicator LED is dark	Detection field is enabled.
Yellow status indicator LED flashes (approx. 4 Hz)	Insufficient function reserve
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition: Incorrect signal measurement


### Resolution and beam clearance

The mechanical beam clearance determines the smallest detectable object size. Crossing the light beams increases the resolution of the light grid.

The devices are delivered without programmed height checking. The beam is crossed three times.

#### Resolution of the crossed beam arrangement

If three-way crossing of the beams is programmed, the resolution increases. For a three-way crossing, this means that the increased resolution is offered after 25% of the transmitter range or receiver range. It must therefore be ensured that all objects pass transmitters or receivers with this clearance.

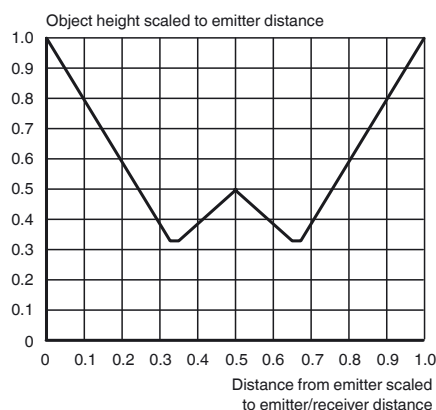

## Model number

L	G	S	x	x	x	-	y	y	y	y	-	IO	/	z	z	z
---	---	---	---	---	---	---	---	---	---	---	---	----	---	---	---	---

Resolution [mm]

(8 mm; 17 mm; 25 mm; 50 mm; 100 mm)

Detection field [mm]

(min. 100 mm ... max. 3200 mm -&gt; see technical data)

IO-Link-interface

## Options

- /35 extended detection range 8 m
- /110 Push-pull output, switch output 0.1 A, short-circuit protected, reverse polarity protection
- /115b with 0.2 m fixed cable and M12 connector
- /146 extended temperature range -30 °C