

motor suppressor varistor, 3x575VAC/4kW

3 x 575 V AC
VDR

Image



- Mounting method
- on motor terminal box with plug connector

Vicarious picture

Approvals



Technical Data

Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
Temperature range	-20...+60 °C
Ring terminals	isolated M6

General data

Connection	approx. 100 mm, single cores 0.5 mm ²
------------	--


Commercial data

Net weight	40
Weight unit	gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Minimum order quantity (piece)	1

Comments

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Circuit diagram

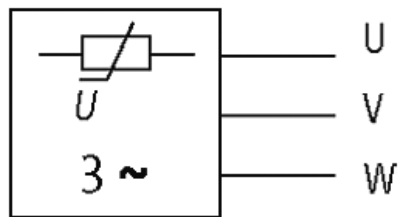

VDR

Dimension drawing

